



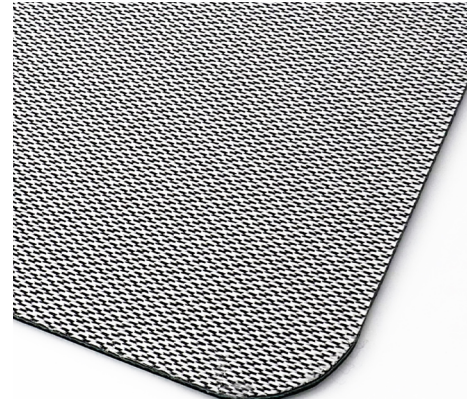

**SMOOTH SURFACE**

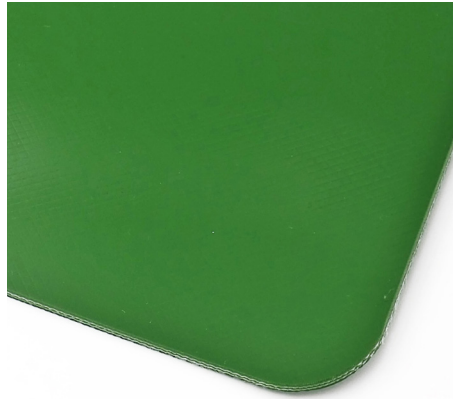

TEXTILE CARCASS		CONVEYING SURFACE		DRIVING SURFACE	
Material:	<b>POLYESTER</b>	Material:	<b>PVC</b>	Material:	<b>FABRIC WITH TPU IMPREGNATION</b>
Number of plies:	<b>2</b>	Thickness:	<b>1,0 mm</b>	Thickness:	-
Fabric:	<b>RIGID</b>	Surface:	<b>SMOOTH</b>	Surface:	<b>LdB FABRIC</b>
		Color:	<b>APPLE GREEN</b>	Color:	<b>WHITE</b>
		Hardness Shore A:	<b>60</b>	Hardness Shore A:	-
		(+/- 5)			

**TECHNICAL DATA SHEET**

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
<b>2,5 mm</b>	<b>2,90</b>	<b>12 N/mm</b>	<b>24 N/mm</b>	<b>50 mm</b>	<b>60 mm</b>	<b>-15 / 60</b>	<b>NOT</b>

**MOST POPULAR APPLICATION**



FOOD AND AGRICULTURE